

Secure Bird's Eye View Of Your IT

WEE EDGE[®]
 LEADERS IN IT CUSTOMIZATION & COST OPTIMIZATION

Compact Design
 Great Performance
 Easy To Maintain
 Low Cost
 Reduced Power Consumption
 Increased Product Life Span

GREEN computing!



intel partner alliance

Microsoft
 OEM DEVICE PARTNER

citrix Ready™
 Endpoint Premium

vmware Partner Connect

SMART • LINUX • ENTERPRISE
 WEE CS

SMART • CENTRALIZED
 WEE CMS

CUSTOMER • RELATIONSHIP
 WEE CRM

Disclaimer: With a view to ensure ongoing product enhancement & development, we reserve the right to change any specifications/versions, without any prior notice. It is acknowledged that all Trademarks remain the property of their respective owners.



VE-9560 (J1800)

System Specification



Operating System

- Linux / Windows Pro / IOT

Processor

- Intel Baytrail J1800 2.4 GHz upto 2.58 GHz Dual Core, 2 Threads (2 Cores)
- 1MB L2 Cache
- Built-in Intel HD Z3700 Series Graphics

System Memory

- DDR3 RAM upgradable upto 8 GB

System Storage

- 2.5" SATA SSD/HDD (up to 1TB HDD/SSD)

Display Support

- Dual digital display outputs with automatic setting of resolution and refresh rate
- Upto 4K Resolution

Operating Environment

- Operating Temperature: 0 to 40°C
- Storage Temperature: 20 to 60°C
- Humidity: 20% to 80% maximum, non-condensing

Energy & Environment

- RoHS

Server OS Compatibility/Support

- Microsoft Windows Terminal Server Edition - Windows Server 2003/2008/2012
- Citrix XenApp/Citrix Presentation Server/ Citrix XenDesktop
- Protocol Support: TCP/IP, DHCP, FTP, HTTP, HTTPS

Panels

- 1 x DC in connector
- 1 x Gigabit LAN
- 1 x HDMI
- Power Button
- 1 x USB 3.1
- 6 x USB 2.1
- 1 x Audio
- 1 x Mic
- 1 x VGA

Wireless LAN

- USB Wi-Fi Dongle (Optional)

External Power Adapter

- DC output 19V-3.42 A / 12V-5 A

Included Accessories

- 1 x Power Adapter
- 1 x Vesa Mount (Optional)

Networking

- Auto-sensing 10/100/1000 Mbps Gigabit LAN
- Wake On LAN

Physical Characteristics

- Dimensions (W x D x H): 215x190x60 mm

Warranty

- Three years limited warranty

Software Support

- Citrix Receiver
- VMware Horizon Client
- RDP
- XfreeRDP
- Firefox (ESR)
- X11/XDMCP
- REXEC
- Spice
- Text Editor
- File Manager
- Data Card
- Google-Chrome

Remote Management Tools (Optional)

- VECMS (Endpoint Central Management System)
 - Remote Shadowing
 - Grouping of Devices
 - Remote Patch & Application Updates
 - Alert Management & Reporting



Disclaimer: With a view to ensure ongoing product enhancement & development, we reserve the right to change any specifications/versions, without any prior notice. It is acknowledged that all Trademarks remain the property of their respective owners.



VE-9900 (J1900)

System Specification



Operating System

- Linux / Windows Pro / IOT

Processor

- Intel Baytrail J1900 2.0 GHz upto 2.42 GHz Quad Core, 4 Threads (4 Cores)
- 2MB L2 Cache
- Built-in Intel HD Z3700 Series Graphics

System Memory

- 4 GB DDR3 RAM upgradable upto 8 GB

System Storage

- 2.5" SATA SSD/HDD (up to 1TB HDD/SSD)

Display Support

- Dual digital display outputs with automatic setting of resolution and refresh rate
- Upto 4K Resolution

Operating Environment

- Operating Temperature: 0 to 40°C
- Storage Temperature: 20 to 60°C
- Humidity: 20% to 80% maximum, non-condensing

Energy & Environment

- RoHS

Server OS Compatibility/Support

- Microsoft Windows Terminal Server Edition - Windows Server 2003/2008/2012
- Citrix XenApp/Citrix Presentation Server/ Citrix XenDesktop
- Protocol Support: TCP/IP, DHCP, FTP, HTTP, HTTPS

Panels

- 1 x DC in connector
- 1 x Gigabit LAN
- 1 x HDMI
- Power Button
- 1 x USB 3.1
- 6 x USB 2.1
- 1 x Audio
- 1 x Mic
- 1 x VGA

Wireless LAN

- USB Wi-Fi Dongle (Optional)

External Power Adapter

- DC output 19V-3.42 A / 12V-5 A

Included Accessories

- 1 x Power Adapter
- 1 x Vesa Mount (Optional)

Networking

- Auto-sensing 10/100/1000 Mbps Gigabit LAN
- Wake On LAN

Physical Characteristics

- Dimensions (W x D x H): 215x190x60 mm

Warranty

- Three years limited warranty

Software Support

- Citrix Receiver
- VMware Horizon Client
- RDP
- XfreeRDP
- Firefox (ESR)
- X11/XDMCP
- REXEC
- Spice
- Text Editor
- File Manager
- Data Card
- Google-Chrome

Remote Management Tools (Optional)

- VECMS (Endpoint Central Management System)
 - Remote Shadowing
 - Grouping of Devices
 - Remote Patch & Application Updates
 - Alert Management & Reporting



Disclaimer: With a view to ensure ongoing product enhancement & development, we reserve the right to change any specifications/versions, without any prior notice. It is acknowledged that all Trademarks remain the property of their respective owners.



VE-9560

System Specification



Operating System

- Linux / Windows Pro / IOT

Processor

- Intel Gemini Lake CDC 2.0 GHz upto 2.8 GHz Dual Core, 2 Threads (2 Cores)
- 4MB shared L2 Cache
- Built-in Intel UHD 600 Series Graphics

System Memory

- RAM: 4 GB DDR4L upgradable upto 8 GB

System Storage

- SSD 128 GB SATA (up to 1TB SSD/HDD)

Display Support

- Dual digital display outputs with automatic setting of resolution and refresh rate
- Upto 4K Resolution

Operating Environment

- Operating Temperature: 0 to 40°C
- Storage Temperature: 20 to 60°C
- Humidity: 20% to 80% maximum, non-condensing

Energy & Environment

- RoHS

Server OS Compatibility/Support

- Microsoft Windows Terminal Server Edition - Windows Server 2003/2008/2012
- Citrix XenApp/Citrix Presentation Server/ Citrix XenDesktop
- Protocol Support: TCP/IP, DHCP, FTP, HTTP, HTTPS

Panels

- 1 x DC in connector
- 1 x Gigabit LAN
- 1 x HDMI
- 1 x VGA
- Power Button
- 4 x USB 3.0+1 C
- 4 x USB 2.0
- 1 x Audio
- 1 x Mic

Wireless LAN

- USB Wi-Fi Dongle (Optional)

External Power Adapter

- DC output 19V / 3.42A

Included Accessories

- 1 x Power Adapter
- 1 x Vesa Mount (Optional)

Networking

- Auto-sensing 10/100/1000 Mbps Gigabit LAN
- Wake On LAN

Physical Characteristics

- Dimensions (W x D x H): 212x198x53 mm

Warranty

- Three years limited warranty

Software Support

- Citrix Receiver
- VMware Horizon Client
- RDP
- XfreeRDP
- Firefox (ESR)
- X11/XDMCP
- REXEC
- Spice
- Text Editor
- File Manager
- Data Card
- Google-Chrome

Remote Management Tools (Optional)

- VECMS (Endpoint Central Management System)
 - Remote Shadowing
 - Grouping of Devices
 - Remote Patch & Application Updates
 - Alert Management & Reporting



Disclaimer: With a view to ensure ongoing product enhancement & development, we reserve the right to change any specifications/versions, without any prior notice. It is acknowledged that all Trademarks remain the property of their respective owners.



VE-TC-N4020

System Specification



Operating System

- Linux / Windows Pro / IOT

Processor

- Intel Celeron N4020 1.1 GHz upto 2.8 GHz Dual Core, 2 Threads (2 Cores)
- 4MB shared L2 Cache
- Built-in Intel UHD 600 Series Graphics

System Memory

- RAM: 4 GB DDR4 upgradable upto 8 GB

System Storage

- 64 GB Emmc built-in + (up to 1TB HDD/SSD) 2.5" SATA SSD/HDD

Display Support

- Dual digital display outputs with automatic setting of resolution and refresh rate
- Upto 4K Resolution

Operating Environment

- Operating Temperature: 0 to 40°C
- Storage Temperature: 20 to 60°C
- Humidity: 20% to 80% maximum, non-condensing

Energy & Environment

- RoHS

Server OS Compatibility/Support

- Microsoft Windows Terminal Server Edition - Windows Server 2003/2008/2012
- Citrix XenApp/Citrix Presentation Server Citrix XenDesktop
- Protocol Support: TCP/IP, DHCP, FTP, HTTP, HTTPS

Panels

- 1 x DC in connector
- 1 x Gigabit LAN
- 1 x HDMI 1.4
- 1 x HDMI 2.0
- 1 x VGA D-Sub
- Power Button
- 3 x USB 3.1+1C
- 2 x USB 2.1
- 1 x Combo Jack
- 1 x Digital Jack

Wireless LAN

- 802.11ac (Optional) +BT 4.0 (Optional)

External Power Adapter

- DC output 19V / 3.42A

Included Accessories

- 1 x Power Adapter
- 1 x Vesa Mount (Optional)

Networking

- Auto-sensing 10/100/1000 Mbps Gigabit LAN
- Wake On LAN

Physical Characteristics

- Dimensions (W x D x H): 132x118x56 mm

Warranty


- Three years limited warranty

Software Support

- Citrix Receiver
- VMware Horizon Client
- RDP
- XfreeRDP
- Firefox (ESR)
- X11/XDMCP
- REXEC
- Spice
- Text Editor
- File Manager
- Data Card
- Google-Chrome

Remote Management Tools (Optional)

- VECMS (Endpoint Central Management System)
 - Remote Shadowing
 - Grouping of Devices
 - Remote Patch & Application Updates
 - Alert Management & Reporting



Disclaimer: With a view to ensure ongoing product enhancement & development, we reserve the right to change any specifications/versions, without any prior notice. It is acknowledged that all Trademarks remain the property of their respective owners.



VE-TC-N4120

System Specification



Operating System

- Linux / Windows Pro / IOT

Processor

- Intel Gemini Lake N4120 1.1 GHz upto 2.6 GHz Quad Core, 4 Threads (4 Cores)
- 4MB shared L2 Cache
- Built-in Intel UHD 600 Series Graphics

System Memory

- RAM: 4 GB DDR4 upgradable upto 8 GB

System Storage

- 64 GB Emmc built-in + (up to 1TB HDD/SSD) 2.5" SATA SSD/HDD

Display Support

- Dual digital display outputs with automatic setting of resolution and refresh rate
- Upto 4K Resolution

Operating Environment

- Operating Temperature: 0 to 40°C
- Storage Temperature: 20 to 60°C
- Humidity: 20% to 80% maximum, non-condensing

Energy & Environment

- RoHS

Server OS Compatibility/Support

- Microsoft Windows Terminal Server Edition - Windows Server 2003/2008/2012
- Citrix XenApp/Citrix Presentation Server/ Citrix XenDesktop
- Protocol Support: TCP/IP, DHCP, FTP, HTTP, HTTPS

Panels

- 1 x DC in connector
- 1 x Gigabit LAN
- 1 x HDMI 1.4
- 1 x HDMI 2.0
- 1 x VGA D-Sub
- Power Button
- 3 x USB 3.1+1C
- 2 x USB 2.0
- 1 x Combo Jack
- 1 x Digital Jack

Wireless LAN

- 802.11ac (Optional) +BT 4.0 (Optional)

External Power Adapter

- DC output 19V / 3.42A

Included Accessories

- 1 x Power Adapter
- 1 x Vesa Mount (Optional)

Networking

- Auto-sensing 10/100/1000 Mbps Gigabit LAN
- Wake On LAN

Physical Characteristics

- Dimensions (W x D x H): 132x118x56 mm

Warranty

- Three years limited warranty

Software Support

- Citrix Receiver
- VMware Horizon Client
- RDP
- XfreeRDP
- Firefox (ESR)
- X11/XDMCP
- REXEC
- Spice
- Text Editor
- File Manager
- Data Card
- Google-Chrome

Remote Management Tools (Optional)

- VECMS (Endpoint Central Management System)
 - Remote Shadowing
 - Grouping of Devices
 - Remote Patch & Application Updates
 - Alert Management & Reporting



Disclaimer: With a view to ensure ongoing product enhancement & development, we reserve the right to change any specifications/versions, without any prior notice. It is acknowledged that all Trademarks remain the property of their respective owners.



VE-J4125

System Specification



Operating System

- Linux / Windows Pro / IOT

Processor

- Intel Gemini Lake J4125 2.0 GHz upto 2.5 GHz Quad Core, 4 Threads (4 Cores)
- 4MB shared L2 Cache
- Built-in Intel UHD 600 Series Graphics

System Memory

- RAM: 4 GB DDR4L upgradable upto 8 GB

System Storage

- M.2 SATA 2280 SSD/HDD

Display Support

- Dual digital display outputs with automatic setting of resolution and refresh rate
- Upto 4K Resolution

Operating Environment

- Operating Temperature: 0 to 40°C
- Storage Temperature: 20 to 60°C
- Humidity: 20% to 80% maximum, non-condensing

Energy & Environment

- RoHS

Server OS Compatibility/Support

- Microsoft Windows Terminal Server Edition - Windows Server 2003/2008/2012
- Citrix XenApp/Citrix Presentation Server/ Citrix XenDesktop
- Protocol Support: TCP/IP, DHCP, FTP, HTTP, HTTPS

Panels

- 1 x DC in connector
- 1 x Gigabit LAN
- 1 x HDMI
- 1 x VGA
- Power Button
- 4 x USB 3.0+1C
- 4 x USB 2.1
- 1 x Audio
- 1 x Mic

Wireless LAN

- USB Wi-fi Dongle (Optional)

External Power Adapter

- DC output 19V / 3.42A

Included Accessories

- 1 x Power Adapter
- 1 x Vesa Mount (Optional)

Networking

- Auto-sensing 10/100/1000 Mbps Gigabit LAN
- Wake On LAN

Physical Characteristics

- Dimensions (W x D x H): 215x190x60 mm

Warranty


- Three years limited warranty

Software Support

- Citrix Receiver
- VMware Horizon Client
- RDP
- XfreeRDP
- Firefox (ESR)
- X11/XDMCP
- REXEC
- Spice
- Text Editor
- File Manager
- Data Card
- Google-Chrome

Remote Management Tools (Optional)

- VECMS (Endpoint Central Management System)
 - Remote Shadowing
 - Grouping of Devices
 - Remote Patch & Application Updates
 - Alert Management & Reporting



Disclaimer: With a view to ensure ongoing product enhancement & development, we reserve the right to change any specifications/versions, without any prior notice. It is acknowledged that all Trademarks remain the property of their respective owners.



VE-TC-N5000

System Specification



Operating System

- Linux / Windows Pro / IOT

Processor

- Intel Gemini Lake N5000 1.1 GHz upto 2.7 GHz Quad Core, 4 Threads (4 Cores)
- 4MB shared L2 Cache
- Built-in Intel UHD 605 Series Graphics

System Memory

- RAM: 4 GB DDR4L upgradable upto 8 GB

System Storage

- 64 GB Emmc built-in + (up to 1TB HDD/SSD)
- 2.5" SATA SSD/HDD

Display Support

- Dual digital display outputs with automatic setting of resolution and refresh rate
- Upto 4K Resolution

Operating Environment

- Operating Temperature: 0 to 40°C
- Storage Temperature: 20 to 60°C
- Humidity: 20% to 80% maximum, non-condensing

Energy & Environment

- RoHS

Server OS Compatibility/Support

- Microsoft Windows Terminal Server Edition - Windows Server 2003/2008/2012
- Citrix XenApp/Citrix Presentation Server/ Citrix XenDesktop
- Protocol Support: TCP/IP, DHCP, FTP, HTTP, HTTPS

Panels

- 1 x DC in connector
- 1 x Gigabit LAN
- 1 x HDMI
- 1 x VGA
- Power Button
- 3 x USB 3.1+1C
- 2 x USB 2.0
- 1 x Combo Jack

Wireless LAN

- 802.11ac (Optional) +BT 4.0 (Optional)

External Power Adapter

- DC output 19V / 3.42A

Included Accessories

- 1 x Power Adapter
- 1 x Vesa Mount (Optional)

Networking

- Auto-sensing 10/100/1000 Mbps Gigabit LAN
- Wake On LAN

Physical Characteristics

- Dimensions (W x D x H): 132x118x56 mm

Warranty

- Three years limited warranty

Software Support

- Citrix Receiver
- VMware Horizon Client
- RDP
- XfreeRDP
- Firefox (ESR)
- X11/XDMCP
- REXEC
- Spice
- Text Editor
- File Manager
- Data Card
- Google-Chrome

Remote Management Tools (Optional)

- VECMS (Endpoint Central Management System)
 - Remote Shadowing
 - Grouping of Devices
 - Remote Patch & Application Updates
 - Alert Management & Reporting



Disclaimer: With a view to ensure ongoing product enhancement & development, we reserve the right to change any specifications/versions, without any prior notice. It is acknowledged that all Trademarks remain the property of their respective owners.



VE-TC-N5030

System Specification



Operating System

- Linux / Windows Pro / IOT

Processor

- Intel Pentium Silver N5030 - 1.1 GHz to 3.10 GHz Quad Core, 4 Threads (4 Cores)
- 4MB shared L2 Cache
- Built-in Intel UHD 605 Series Graphics

System Memory

- RAM: 4 GB DDR4L upgradable upto 8 GB

System Storage

- 64 GB Emmc built-in + (up to 1TB HDD/SSD)
- 2.5" SATA SSD/HDD

Display Support

- Dual digital display outputs with automatic setting of resolution and refresh rate
- Upto 4K Resolution

Operating Environment

- Operating Temperature: 0 to 40°C
- Storage Temperature: 20 to 60°C
- Humidity: 20% to 80% maximum, non-condensing

Energy & Environment

- RoHS

Server OS Compatibility/Support

- Microsoft Windows Terminal Server Edition - Windows Server 2003/2008/2012
- Citrix XenApp/Citrix Presentation Server/ Citrix XenDesktop
- Protocol Support: TCP/IP, DHCP, FTP, HTTP, HTTPS

Panels

- 1 x DC in connector
- 1 x Gigabit LAN
- 1 x HDMI
- 1 x VGA
- Power Button
- 3 x USB 3.1+1C
- 2 x USB 2.0
- 1 x Combo Jack

Wireless LAN

- 802.11 ac (Optional) +BT 4.0 (Optional)

External Power Adapter

- DC output 19V / 3.42A

Included Accessories

- 1 x Power Adapter
- 1 x Vesa Mount (Optional)

Networking

- Auto-sensing 10/100/1000 Mbps Gigabit LAN
- Wake On LAN

Physical Characteristics

- Dimensions (W x D x H): 132x118x56 mm

Warranty

- Three years limited warranty

Software Support

- Citrix Receiver
- VMware Horizon Client
- RDP
- XfreeRDP
- Firefox (ESR)
- X11/XDMCP
- REXEC
- Spice
- Text Editor
- File Manager
- Data Card
- Google-Chrome

Remote Management Tools (Optional)

- VECMS (Endpoint Central Management System)
 - Remote Shadowing
 - Grouping of Devices
 - Remote Patch & Application Updates
 - Alert Management & Reporting





VE-TC-N6000

System Specification



Operating System

- Linux / Windows Pro / IOT

Processor

- Intel Jasper Lake (Pentium Silver N6000)
4MB shared L3 Cache
- Built-in Intel UHD Graphics

System Memory

- RAM: 4 GB DDR4 upgradable upto 8 GB

System Storage

- 128 GB Emmc built-in + (up to 1TB HDD/SSD)
M.2 SATA 2280 SSD/HDD

Display Support

- Dual digital display outputs with automatic setting of resolution and refresh rate
- Upto 4K Resolution

Operating Environment

- Operating Temperature: 0 to 40°C
- Storage Temperature: 20 to 60°C
- Humidity: 20% to 80% maximum, non-condensing

Energy & Environment

- RoHS

Server OS Compatibility/Support

- Microsoft Windows Terminal Server Edition - Windows Server 2003/2008/2012
- Citrix XenApp/Citrix Presentation Server/ Citrix XenDesktop
- Protocol Support: TCP/IP, DHCP, FTP, HTTP, HTTPS

Panels

- 1 x DC in connector
- 1 x Gigabit LAN
- 1 x HDMI
- Power Button
- 3 x USB 3.2
- 1 x USB 2.0
- 1 x Audio Combo
- 1 x DP

Wireless LAN

- 802.11ax (Optional) +BT 4.2 (Optional)

External Power Adapter

- DC output 19V / 3.42A

Included Accessories

- 1 x Power Adapter
- 1 x Vesa Mount (Optional)

Networking

- Auto-sensing 10/100/1000 Mbps Gigabit LAN
- Wake On LAN

Physical Characteristics

- Dimensions (W x D x H): 74x74x34.6 mm

Warranty

- Three years limited warranty

Software Support

- Citrix Receiver
- VMware Horizon Client
- RDP
- XfreeRDP
- Firefox (ESR)
- X11/XDMCP
- REXEC
- Spice
- Text Editor
- Data Card
- File Manager
- Google-Chrome

Remote Management Tools (Optional)

- VECMS (Endpoint Central Management System)
 - Remote Shadowing
 - Grouping of Devices
 - Remote Patch & Application Updates
 - Alert Management & Reporting



Disclaimer: With a view to ensure ongoing product enhancement & development, we reserve the right to change any specifications/versions, without any prior notice. It is acknowledged that all Trademarks remain the property of their respective owners.



VE-SFF6030 METAL i3 4th GEN

System Specification



Operating System

- Linux / Windows Pro / IOT

Processor

- Intel Core i3-4020Y Base Frequency 1.5 GHz Dual Core, 4 Threads (2 Cores)
- 3MB Intel Smart Cache
- Built-in Intel HD 4200 Series Graphics

System Memory

- DDR3 RAM upgradable upto 8 GB

System Storage

- M SATA SSD/HDD

Display Support

- Dual digital display outputs with automatic setting of resolution and refresh rate
- Upto 4K Resolution

Operating Environment

- Operating Temperature: 0 to 40°C
- Storage Temperature: 20 to 60°C
- Humidity: 20% to 80% maximum, non-condensing

Energy & Environment

- RoHS

Server OS Compatibility/Support

- Microsoft Windows Terminal Server Edition - Windows Server 2003/2008/2012
- Citrix XenApp/Citrix Presentation Server/ Citrix XenDesktop
- Protocol Support: TCP/IP, DHCP, FTP, HTTP, HTTPS

Panels

- 1 x DC in connector
- 1 x Gigabit LAN
- 1 x HDMI
- 1 x VGA
- Power Button
- 4 x USB 3.0
- 2 x USB 2.1
- 1 x Audio
- 1 x Mic

Wireless LAN

- USB Wi-Fi Dongle (Optional)

External Power Adapter

- DC output 12V / 5A

Included Accessories

- 1 x Power Adapter
- 1 x Vesa Mount (Optional)

Networking

- Auto-sensing 10/100/1000 Mbps Gigabit LAN
- Wake On LAN

Physical Characteristics

- Dimensions (W x D x H): 175x128x39 mm

Warranty


- Three years limited warranty

Software Support

- Citrix Receiver
- VMware Horizon Client
- RDP
- XfreeRDP
- Firefox (ESR)
- X11/XDMCP
- REXEC
- Spice
- Text Editor
- Data Card
- File Manager
- Google-Chrome

Remote Management Tools (Optional)

- VECMS (Endpoint Central Management System)
 - Remote Shadowing
 - Grouping of Devices
 - Remote Patch & Application Updates
 - Alert Management & Reporting



Disclaimer: With a view to ensure ongoing product enhancement & development, we reserve the right to change any specifications/versions, without any prior notice. It is acknowledged that all Trademarks remain the property of their respective owners.



VE-SFF03 410 i3 10/11th GEN

System Specification



Operating System

- Linux / Windows Pro / IOT

Processor

- Intel Core i3 9th Gen 3.1 GHz upto 4.3 GHz
8 Threads (4 Cores)
- 6MB Intel Smart Cache
- Built-in Intel HD 630 Series Graphics

System Memory

- DDR4L RAM upgradable upto 8 GB

System Storage

- SSD 128 GB SATA (up to 1TB SSD/HDD)

Display Support

- Dual digital display outputs with automatic setting of resolution and refresh rate
- Upto K Resolution

Operating Environment

- Operating Temperature: 0 to 40°C
- Storage Temperature: 20 to 60°C
- Humidity: 20% to 80% maximum, non-condensing

Energy & Environment

- RoHS

Server OS Compatibility/Support

- Microsoft Windows Terminal Server Edition - Windows Server 2003/2008/2012
- Citrix XenApp/Citrix Presentation Server/ Citrix XenDesktop
- Protocol Support: TCP/IP, DHCP, FTP, HTTP, HTTPS

Panels

- 1 x DC in connector
- 1 x Gigabit LAN
- 1 x HDMI
- Power Button
- 6 x USB
- 1 x Audio
- 1 x Mic
- 1 x VGA

Wireless LAN

- USB Wi-Fi Dongle (Optional)

External Power Adapter

- DC output 12V / 5 A

Included Accessories

- 1 x Power Adapter
- 1 x Vesa Mount (Optional)

Networking

- Auto-sensing 10/100/1000 Mbps Gigabit LAN
- Wake On LAN

Physical Characteristics

- Dimensions (W x D x H): 215x190x70 mm

Warranty

- Three years limited warranty

Software Support

- Citrix Receiver
- VMware Horizon Client
- RDP
- XfreeRDP
- Firefox (ESR)
- X11/XDMCP
- REXEC
- Spice
- Text Editor
- File Manager
- Data Card
- Google-Chrome

Remote Management Tools (Optional)

- VECMS (Endpoint Central Management System)
 - Remote Shadowing
 - Grouping of Devices
 - Remote Patch & Application Updates
 - Alert Management & Reporting





VE-SFF-Z3103 - i3 & i5

System Specification



Operating System

- Linux / Windows Pro / IOT

Processor

- Intel Comet Lake-U 10 th Gen Core™ i3-10110U SoC / i5-10210U SoC

System Memory

- 2 x SO-DIMM DDR4 2666MHz up to 64GB

System Storage

- M.2 2280 SATA/PCIe SSD

Display Support

- Dual digital display outputs with automatic setting of resolution and refresh rate
- Upto 4K Resolution

Operating Environment

- Operating Temperature: 0 to 40°C
- Storage Temperature: 20 to 60°C
- Humidity: 20% to 80% maximum, non-condensing

Energy & Environment

- RoHS

Server OS Compatibility/Support

- Microsoft Windows Terminal Server Edition - Windows Server 2003/2008/2012
- Citrix XenApp/Citrix Presentation Server/ Citrix XenDesktop
- Protocol Support: TCP/IP, DHCP, FTP, HTTP, HTTPS

Panels

- 1 x DC in connector
- 2 x Gigabit LAN
- 1 x HDMI 2.0 + 1 x mDP
- Power Button
- 1 x USB 3.1 Gen 1+1C
- 3 x USB 3.1 Gen 1
- 1 x Combo Jack
- 1 x Digital Mic

Wireless LAN

- 1 x M.2 2230 WLAN 802.11 ax (Optional)

External Power Adapter

- DC output 19V / 4.74A

Included Accessories

- 1 x Power Adapter
- 1 x Vesa Mount (Optional)

Networking

- Auto-sensing 10/100/1000 Mbps Gigabit LAN
- Wake On LAN

Physical Characteristics

- Dimensions (W x D x H): 117x128x35 mm

Warranty


- Three years limited warranty

Software Support

- Citrix Receiver
- VMware Horizon Client
- RDP
- XfreeRDP
- Firefox (ESR)
- X11/XDMCP
- REXEC
- Spice
- Text Editor
- File Manager
- Data Card
- Google-Chrome

Remote Management Tools (Optional)

- VECMS (Endpoint Central Management System)
 - Remote Shadowing
 - Grouping of Devices
 - Remote Patch & Application Updates
 - Alert Management & Reporting



Disclaimer: With a view to ensure ongoing product enhancement & development, we reserve the right to change any specifications/versions, without any prior notice. It is acknowledged that all Trademarks remain the property of their respective owners.



VE-SFF05 310 i5 6th GEN

System Specification



Operating System

- Linux / Windows Pro / IOT

Processor

- Intel Core i5 6500T 2.0 GHz upto 2.7 GHz Quad Core, 4 Threads (4 Cores)
- 6MB Intel Smart Cache
- Built-in Intel HD 530 Series Graphics

System Memory

- DDR4 RAM upgradable upto 16 GB

System Storage

- M.2 SATA 2280 SSD/HDD

Display Support

- Dual digital display outputs with automatic setting of resolution and refresh rate
- Upto 4K Resolution

Operating Environment

- Operating Temperature: 0 to 40°C
- Storage Temperature: 20 to 60°C
- Humidity: 20% to 80% maximum, non-condensing

Energy & Environment

- RoHS

Server OS Compatibility/Support

- Microsoft Windows Terminal Server Edition - Windows Server 2003/2008/2012
- Citrix XenApp/Citrix Presentation Server/ Citrix XenDesktop
- Protocol Support: TCP/IP, DHCP, FTP, HTTP, HTTPS

Panels

- 1 x DC in connector
- 1 x Gigabit LAN
- 1 x HDMI
- 1 x VGA
- Power Button
- 2 x USB 3.0
- 4 x USB 2.0
- 1 x Audio
- 1 x Mic

Wireless LAN

- USB Wi-Fi Dongle (Optional)

External Power Adapter

- DC output 12V / 5A

Included Accessories

- 1 x Power Adapter
- 1 x Vesa Mount (Optional)

Networking

- Auto-sensing 10/100/1000 Mbps Gigabit LAN
- Wake On LAN

Physical Characteristics

- Dimensions (W x D x H): 215x190x70 mm

Warranty

- Three years limited warranty

Software Support

- Citrix Receiver
- VMware Horizon Client
- RDP
- XfreeRDP
- Firefox (ESR)
- X11/XDMCP
- REXEC
- Spice
- Text Editor
- File Manager
- Data Card
- Google-Chrome

Remote Management Tools (Optional)

- VECMS (Endpoint Central Management System)
 - Remote Shadowing
 - Grouping of Devices
 - Remote Patch & Application Updates
 - Alert Management & Reporting



Disclaimer: With a view to ensure ongoing product enhancement & development, we reserve the right to change any specifications/versions, without any prior notice. It is acknowledged that all Trademarks remain the property of their respective owners.




VE-LP-N4020/J4125



Enjoy the mobility of **Vee Edge** Thin Client Laptops and the convenience of cloud or VDI based computing with our selection of dual and quad core mobile laptops. They're an excellent option for businesses looking to streamline maintenance, cost-effective, security and co-operation in their moving workforce.

Dual-Band Wi-Fi
Fast and stable



36W DC charge
Charge faster



Dual BOX Speakers
Dual microphone



All the ports You need
USB-A, USB-C, HDMI



MicroSD card tray 3.5mm audio jack USB 3.0 x 2 DC charging port HDMI USB-C



Disclaimer: With a view to ensure ongoing product enhancement & development, we reserve the right to change any specifications/versions, without any prior notice. It is acknowledged that all Trademarks remain the property of their respective owners.



Windows 11



Windows 11

Powerful for employees.

Consistent for IT.

Secure for all.



Microsoft
OEM DEVICE PARTNER

VEE EDGE
LEADERS IN IT CUSTOMIZATION & COST OPTIMIZATION

Disclaimer: With a view to ensure ongoing product enhancement & development, we reserve the right to change any specifications/versions, without any prior notice. It is acknowledged that all Trademarks remain the property of their respective owners.

Windows 11

Brings you closer to what you love



Simplicity

Simple, powerful UX to improve productivity and focus.




Connectedness

Text, chat, voice, or video call with just a click.



Content

News, information, and entertainment faster

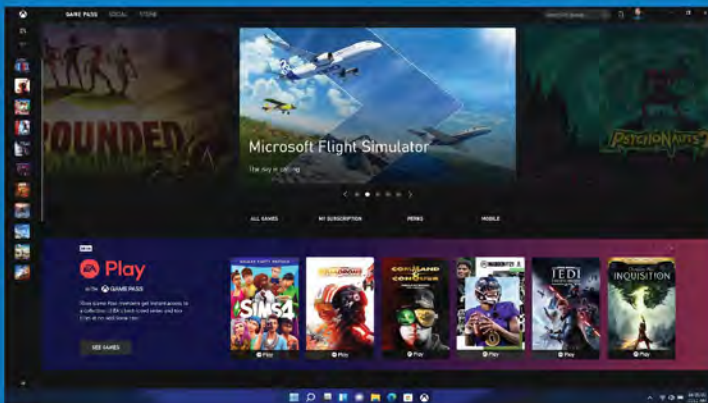

Games

Best way to play games



Ease & Choice

Latest innovations, wide array of prices & form factors.



Disclaimer: With a view to ensure ongoing product enhancement & development, Microsoft reserves the right to change any specifications/versions, without any prior notice. It is acknowledged that all Trademarks remains the property of the respective owner.



Smart Linux Enterprise OS

A Modern, Secure and Intuitive Vee Edge Smart Linux Enterprise Computing Experience

Vee Edge's Cost-Effective Enterprise Computing Solutions guides the development of powerful, practical, and complete IT solutions by combining technologies to address specific business needs. From cloud/edge and data intelligence to security and IoT, **Vee Edge** brings innovative solutions to market through intelligent channels to deliver the modern enterprise



Better Hardware Support



Dynamic Printer Support



Built on Latest Linux Ubuntu Core



Light Weight OS



GUI Based Administration



Optimized for Banks Corporate/Enterprise Users



Complete Admin Control



Remote Management



Online Support



Supports Windows Applications



OS Restore Feature



Online Pre-Configured



Disclaimer: With a view to ensure ongoing product enhancement & development, we reserve the right to change any specifications/versions, without any prior notice. It is acknowledged that all Trademarks remain the property of their respective owners.



Smart Centralized Management System

Supported OS

 Windows 11

 Windows 10

 **LINUX**



Monitoring & Alerts
Monitor Devices for any Hardware and Software Changes and Alert the Admin.



Remote Access Anytime, Anywhere
Remotely and Securely Take Control of All Devices.



Remote Software and Patch Update
Remotely Install or Uninstall any Applications through Software Patch Management.



Controls
Remotely Reboot, Shutdown, Wake-on-LAN, Lock, Unlock and Update Patches on Devices.



Device Security & Health
Monitor the Health and Security Status of All Devices on Real Time Basis.



Hardware/Software Inventory
Collect Inventory Data (Hardware, Software System) in No Time From Multiple Devices.



Logical Grouping
Group Devices Based on Logical Group Names, Eg: Department Name, Floor, etc.



Offline/Online Monitoring
Alerts Sent When Device is Offline.



Report & Export Data
Export Inventory Data Available in CSV, Excel and PDF Formats.



Customizable
VECMS Customizable as per Requirement.



Disclaimer: With a view to ensure ongoing product enhancement & development, we reserve the right to change any specifications/versions, without any prior notice. It is acknowledged that all Trademarks remain the property of their respective owners.



360° 24x7 Customer Relationship Management

Supported OS Platform



LINUX

VECRM software allows businesses to manage customer and prospect relationships with data. It helps store, track, and analyse customer and prospect information in one central location, including contact and account information, sales opportunities, service cases and marketing campaigns. With data in one central location, organisations have a complete picture of customers and prospects that can be shared and analysed by teams across the company on a real-time basis.



Contact Management



Customer Management



Leads/
Opportunity Management



Sales &
Marketing Management



Task Management



Product/Service Management



Employee/
Support Login Management



Call Log Management



FAQ Management




AMC Renewal Alert Management



Customizable &
Scalable



Available on
Cloud &
On-Premise



Disclaimer: With a view to ensure ongoing product enhancement & development, we reserve the right to change any specifications/versions, without any prior notice. It is acknowledged that all Trademarks remain the property of their respective owners.

VEE EDGE[®]

LEADERS IN **IT** CUSTOMIZATION & COST OPTIMIZATION

Corporate Office: Vee Edge Technology Pvt. Ltd., Office No. 101, Dora Rose CHS Ltd, Opposite Yes Bank, I.C Colony, Borivali (W) Mumbai 400 103, Maharashtra, India

☎ +91-8291247332 / +91-9820187332

South Branch Office: Office No. 63, Balakumuran Nagar, Part B, Kolathur Chennai 600099

☎ +91-9941567361 / +91-7094049494

Email: mail@veeedge.com | www.veeedge.com

Manufacturer & Leaders in Customization & Integration of Embedded IT System Hardware & Software with Cost Optimization



Mini PC Dual/Quad Core



Mobile Thin Client Laptop



Mini PC i3/ i5/ i7/ i9



Registered Vendor & Seller

